


GIUNZIONE AD UNA FLANGIA PN 10
FLANGED SPIGOTS PN10

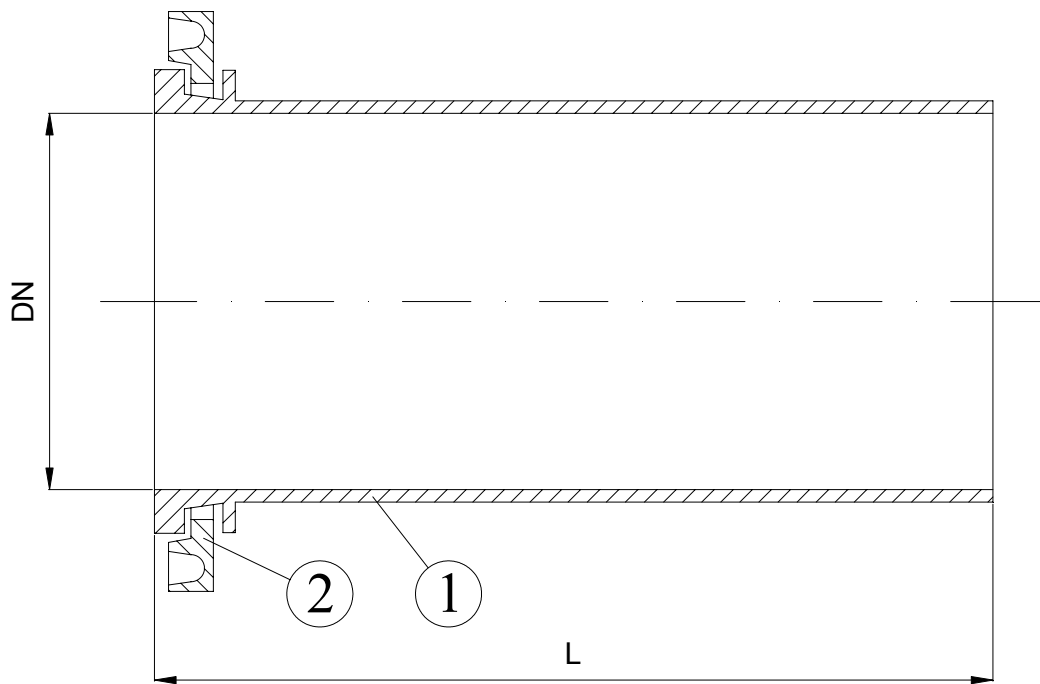

| DN | L | W(kg) |
|-----|-----|-------|
| 65 | 345 | 7 |
| 80 | 350 | 9 |
| 100 | 360 | 11 |
| 125 | 370 | 13 |
| 150 | 375 | 18 |
| 200 | 375 | 29 |
| 250 | 420 | 34 |
| 300 | 440 | 50 |
| 400 | 480 | 69 |

| DENOMINAZIONE PART | MATERIALI MATERIALS |
|---------------------------------------|------------------------|
| 1 CORPO BODY | GJS 400 GJS 400 |
| 2 FLANGE ORIENTABILI LOOSE FLANGES | GJS 400 GJS 400 |

RIVESTIMENTO ESTERNO/INTERNO: Polvere epossidica di colore BLU con spessore min 250 μ m.
SURFACE PROTECTION: FBE coating process with epoxy resin powder of sky blue color and minimum thickness of 250 μ m.