


## M3170 • PRESSURE REDUCING VALVE WITH ON-OFF SOLENOID CONTROL

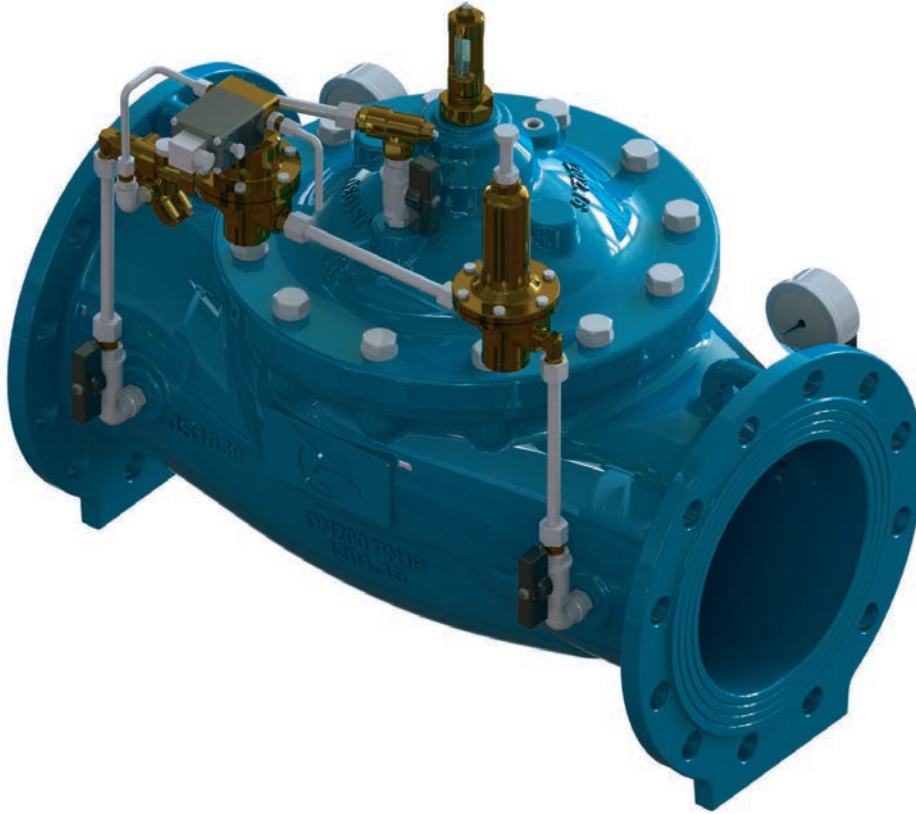

### OPERATING PRINCIPLE

This valve reduces and stabilizes the downstream pressure at a preset value independently of the flow rate and upstream pressure variations and on-off function by a remote signal on solenoid valve.


This type of valve is widely used in main water supply and distribution systems.

The purpose of this valve is to ensure an outlet reduced and stabilized pressure, and to be remotely controlled.

### ADDITIONAL FUNCTIONS


- pressure sustaining;
- non-return;
- reverse opening device;
- opening in case of inlet pressure drop;
- two reduction values settable either with remote electrical or manual control, or using a fully hydraulic device;
- flow rate control;
- minimum-maximum level control with float pilot and dissipating orifice fitted downstream of the valve.

CIRCUIT AND MATERIALS

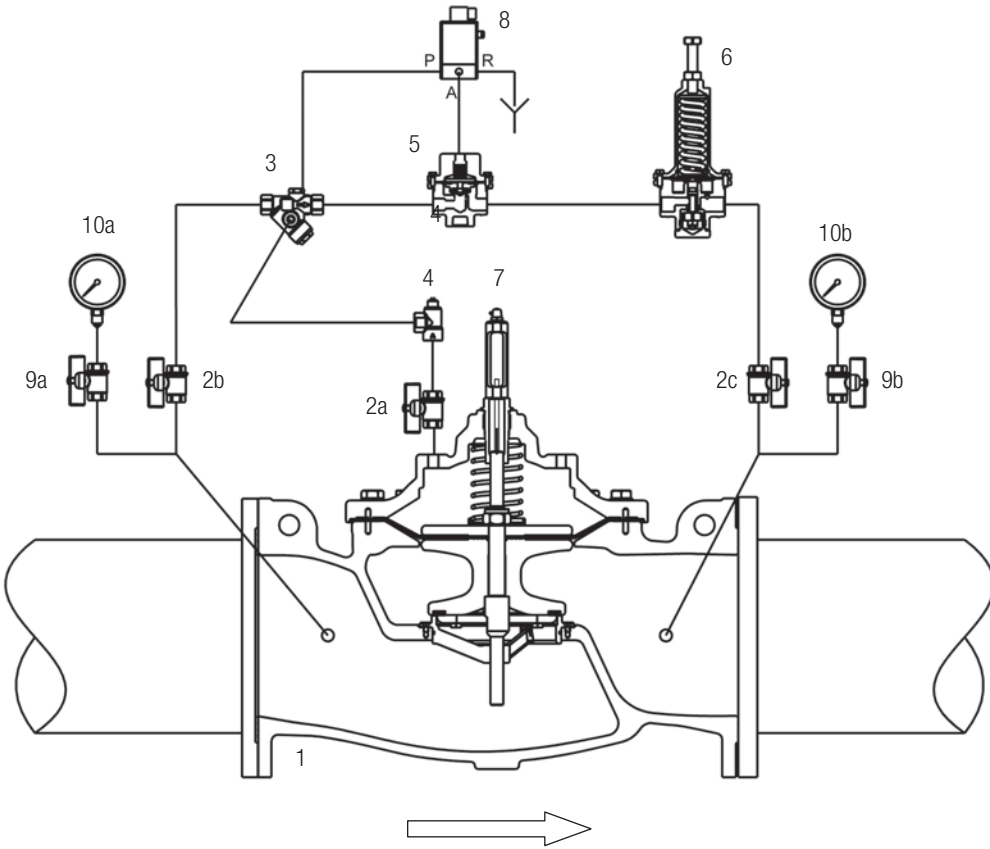

ITEM	DESCRIPTION	MATERIALS
1	Main Valve	GJS400-15 EN1563
2 (a,b,c)	Isolating ball valve	Ni-plated Brass
3	Y - strainer with calibrated orifice	1.4401 EN10088-3 + Brass
4	Monodirectional needle valve	1.4401 EN10088-3 + Brass
5	Auxiliary 2-way N.O. valve VA200	1.4301 EN10088-3 + Brass
6	Pressure reducing pilot CV100	1.4401 EN10088-3 + Brass
7	Position indicator with manual venting cock	Brass + Hardened glass
8	3-way solenoid valve	Brass
9 (a,b)	Gauge holder with drainage	Ni-plated Brass
10 (a,b)	Pressure gauge	1.4301 EN10088-3 + Glycerine
--	Pipe	1.4401 EN10088-3
--	Fittings	1.4401 EN10088-3
--	Compression fittings	1.4401 EN10088-3 + Brass

### TYPICAL INSTALLATION

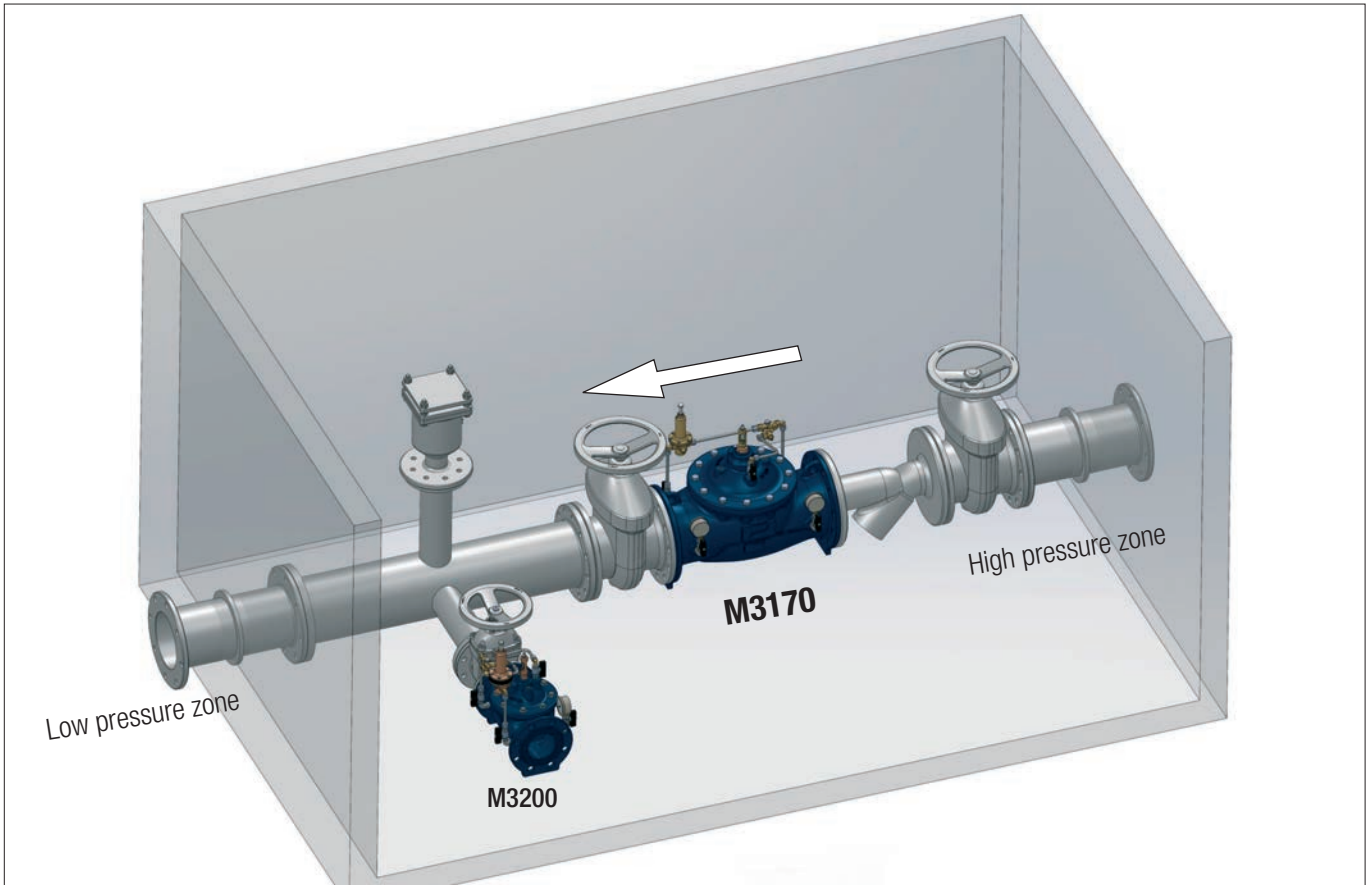

### TYPICAL APPLICATION

