



Art. A363 TIS4


## SARACINESCA IN ACCIAIO A VITE INTERNA PN63 CAST STEEL GATE VALVE NON RISING STEM PN63

### APPLICAZIONE:

Acqua calda e fredda, depurazione, irrigazione.

### APPLICATION:

Hot and cold water, treatment plant, irrigation systems.

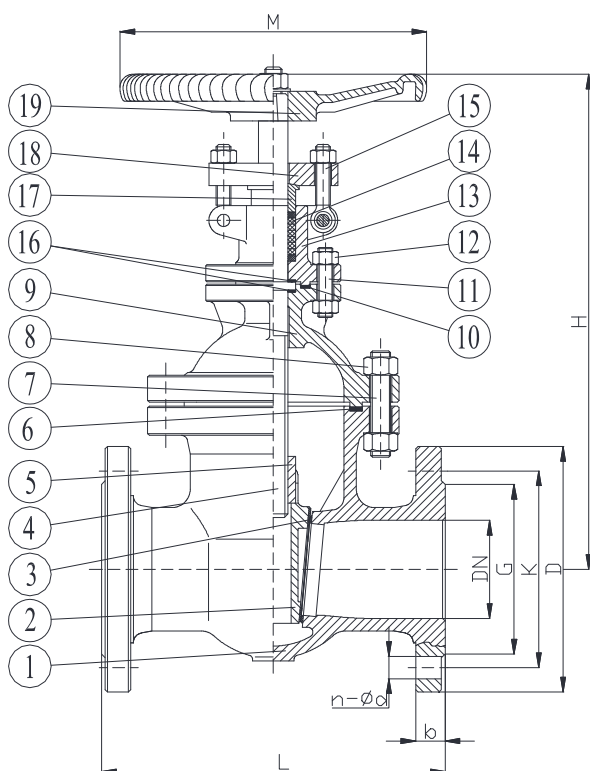

| DN  | G   | K   | D   | L   | H   | M   | n-ød | b  | W (kg) |
|-----|-----|-----|-----|-----|-----|-----|------|----|--------|
| 50  | 102 | 135 | 180 | 250 | 356 | 280 | 4-22 | 26 | 30     |
| 65  | 122 | 160 | 205 | 290 | 400 | 280 | 8-22 | 26 | 35     |
| 80  | 138 | 170 | 215 | 310 | 450 | 320 | 8-22 | 28 | 52     |
| 100 | 162 | 200 | 250 | 350 | 483 | 360 | 8-26 | 30 | 66     |
| 125 | 188 | 240 | 295 | 400 | 558 | 400 | 8-30 | 34 | 103    |
| 150 | 218 | 280 | 345 | 450 | 618 | 450 | 8-33 | 36 | 140    |

### RIVESTIMENTO - COATING

Rivestimento esterno in vernice epossidica di colore blu RAL 5015.  
External surface epoxy coated of blue colour RAL 5015.

### CARATTERISTICHE PRINCIPALI - MAIN FEATURES

|                               |                                                                          |
|-------------------------------|--------------------------------------------------------------------------|
| <b>NORMA PROGETTO:</b>        | EN 12516, EN 1984                                                        |
| <b>SCARTAMENTO:</b>           | EN 558 Serie 26                                                          |
| <b>FLANGE:</b>                | EN 1092-1                                                                |
| <b>COLLAUDI:</b>              | EN 12266-1                                                               |
| <b>TEMPERATURA ESERCIZIO:</b> | Max. +50°C a 63 bar<br>Rapp. pressione/temperatura conforme con EN 12516 |
| <b>DESIGN STANDARD:</b>       | EN 12516, EN 1984                                                        |
| <b>FACE TO FACE:</b>          | EN 558 Serie 26                                                          |
| <b>FLANGES:</b>               | EN 1092-1                                                                |
| <b>TESTS:</b>                 | EN 12266-1                                                               |
| <b>WORKING TEMPERATURE:</b>   | Max. +50°C a 63 bar<br>Rapp. pressione/temperatura conforme con EN 12516 |

|        | COMPONENTI - PARTS        | MATERIALI - MATERIALS                              |
|--------|---------------------------|----------------------------------------------------|
| 1      | CORPO BODY                | DIN 17245 GS-C25<br>DIN 17245 GS-C25               |
| 2      | CUNEO WEDGE               | DIN 17245 GS-C25<br>DIN 17245 GS-C25               |
| 3      | TENUTA SEAT               | ACCIAIO INOX X10Cr13<br>SS X10Cr13                 |
| 4      | ASSE STEM                 | ASTM A182 F6a<br>ASTM A182 F6a                     |
| 5      | MADREVITE STEM NUT        | BRONZO ALLUMINIO<br>ALUMINIUM BRONZE               |
| 6 / 10 | GUARNIZIONE GASKET        | ACC. INOX AISI 304+GRAFITE<br>SS AISI 304+GRAPHITE |
| 7 / 11 | VITE BOLT                 | ASTM A193 B7<br>ASTM A193 B7                       |
| 8 / 12 | DADO NUT                  | ASTM A194 2H<br>ASTM A194 2H                       |
| 9      | CAPPELLO BONNET           | DIN 17245 GS-C25<br>DIN 17245 GS-C25               |
| 13     | CAPPELLO BONNET           | DIN 17245 GS-C25<br>DIN 17245 GS-C25               |
| 14     | GUARNIZIONE GASKET        | GRAFITE<br>GRAPHITE                                |
| 15     | VITE BOLT                 | ASTM A1035<br>ASTM A1035                           |
| 16     | RONDELLA WASHER           | ACC. INOX AISI 304<br>SS AISI 304                  |
| 17     | ANELLO GLAND              | ASTM A182 F6a<br>ASTM A182 F6a                     |
| 18     | PREMISTOPPA PACKING GLAND | DIN 17245 GS-C25<br>DIN 17245 GS-C25               |
| 19     | VOLANTINO HANDWHEEL       | ASTM A536<br>ASTM A536                             |