



PN 25 - Art. A025 TIS

SARACINESCA A CUNEO GOMMATO - CORPO OVALE PN25

SOFT SEATED GATE VALVE - LONG BODY PN25




APPLICAZIONE:

Fornitura e distribuzione acqua potabile, trattamento acque reflue e sistemi fognari, settori industriali.

APPLICATION:

Drinkable water supply and distribution, waste water treatment and sewerage.

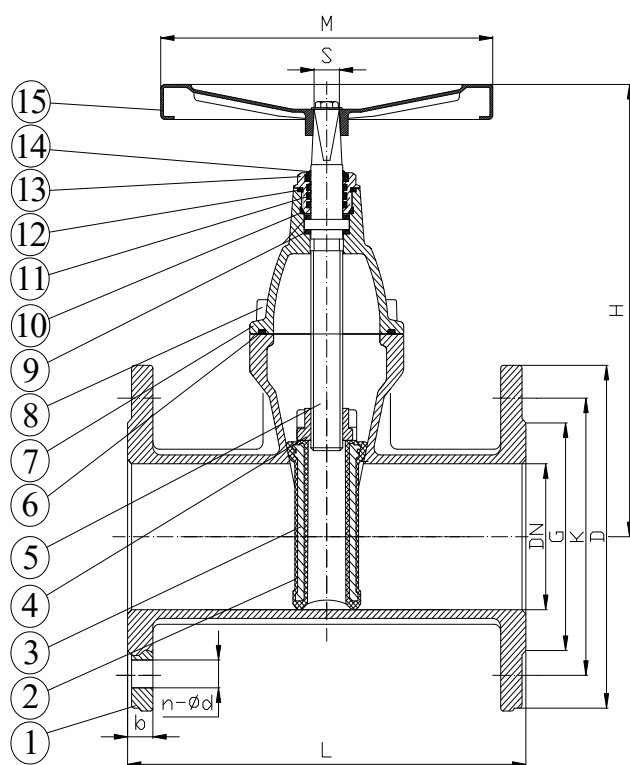

DN	G	K	D	L	H	n-ød	b	M	S	W(kg)
40	84	110	150	240	218	4-19	19	200	14	8.5
50	99	125	165	250	223	4-19	19	200	14	9.5
65	118	145	185	270	248	8-19	19	200	17	12.5
80	132	160	200	280	270	8-19	19	200	17	15
100	156	190	235	300	310	8-23	19	250	19	22
125	184	220	270	325	352	8-28	19	250	19	29
150	211	250	300	350	406	8-28	20	350	19	36.5
200	274	310	360	400	524	12-28	22	350	24	66.5
250	330	370	425	450	605	12-31	24.5	500	27	96
300	389	430	485	500	682	16-31	27.5	500	27	134
350	448	490	555	550	838	16-34	30	500	27	-
400	503	550	620	600	951	16-37	32	640	32	-
450	548	600	670	650	1113	20-37	34.5	800	32	-

CARATTERISTICHE PRINCIPALI - MAIN FEATURES

NORMA PROGETTO:	EN 1171 EN 1074-1 ed EN 1074-2 EN 558 Serie15
SCARTAMENTO:	EN 1092-2
FLANGE:	EN 12266-1
COLLAUDI:	Max. +70°C
TEMP. ESERCIZIO:	
DESIGN STANDARD:	EN 1171 EN 1074-1 and EN 1074-2 EN 558 Series15
FACE TO FACE:	EN 1092-2
FLANGES:	EN 12266-1
TESTS:	Max. +70°C
WORKING TEMP.:	

	COMPONENTI - PARTS	MATERIALI - MATERIALS
1	CORPO BODY	EN-GJS 500-7 EN-GJS 500-7
2	RIVESTIMENTO CUNEO WEDGE	GOMMA EPDM (a richiesta NBR) EPDM COATED (NBR on request)
3	STRUTT. CUNEO CORE	EN-GJS 500-7 EN-GJS 500-7
4	MADREVITE STEM NUT	BRONZO ALLUMINIO ALUMINUM BRONZE
5	ASSE STEM	ACC.INOX AISI 420 (EN 1.4021) SS AISI 420 (EN 1.4021)
6	GUARNIZIONE GASKET	EPDM EPDM
7	CAPPELLO BONNET	EN-GJS 500-7 EN-GJS 500-7
8	VITE SCREW	ACCIAIO ZINCATO 8.8 GALVANIZED STEEL 8.8
9	RONDELLA WASHER	NYLON NYLON
10	O-RING O-RING	EPDM EPDM
11	O-RING O-RING	EPDM EPDM
12	O-RING O-RING	EPDM EPDM
13	BOCCOLA DI TENUTA SEALING NUT	BRONZO ALLUMINIO ALUMINUM BRONZE
14	PARAPOLVERE DUSTPROOF	EPDM EPDM
15	VOLANTINO HANDWHEEL	ACCIAIO / EN-GJS 500-7 STEEL / EN-GJS 500-7

RIVESTIMENTO - COATING

Esterno/interno con polvere epossidica di colore blu RAL 5015 e spessore 250mm.

External/internal FBE coating process with epoxy resin powder of blue colour RAL 5015 and thickness of 250mm.