



Art. A340 TIS4


SARACINESCA IN ACCIAIO A VITE INTERNA PN40 CAST STEEL GATE VALVE NON RISING STEM PN40

APPLICAZIONE:

Acqua calda e fredda, depurazione, irrigazione.

APPLICATION:

Hot and cold water, treatment plant, irrigation systems.

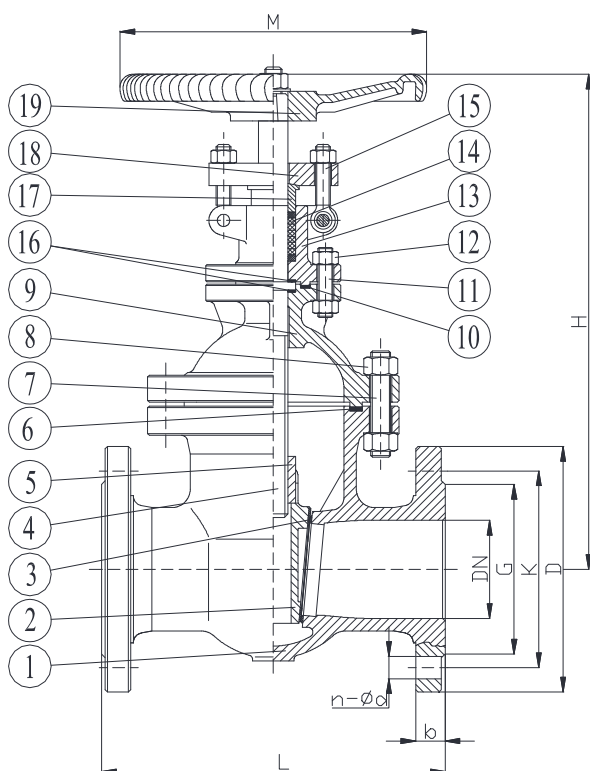

DN	G	K	D	L	H	M	n-ød	b	W (kg)
50	102	125	165	250	325	200	4-18	20	22
65	122	145	185	290	363	200	8-18	22	31
80	138	160	200	310	415	250	8-18	24	41.5
100	162	190	235	350	453	300	8-22	24	61
125	188	220	270	400	505	350	8-26	26	83
150	218	250	300	450	556	400	8-26	28	110

RIVESTIMENTO - COATING

Rivestimento esterno in vernice epossidica di colore blu RAL 5015.
External surface epoxy coated of blue colour RAL 5015.

CARATTERISTICHE PRINCIPALI - MAIN FEATURES

NORMA PROGETTO:	EN 12516, EN 1984
SCARTAMENTO:	EN 558 Serie 26
FLANGE:	EN 1092-1
COLLAUDI:	EN 12266-1
TEMPERATURA ESERCIZIO:	Max. +50°C a 40 bar Rapp. pressione/temperatura conforme con EN 12516
DESIGN STANDARD:	EN 12516, EN 1984
FACE TO FACE:	EN 558 Serie 26
FLANGES:	EN 1092-1
TESTS:	EN 12266-1
WORKING TEMPERATURE:	Max. +50°C a 40 bar Rapp. pressione/temperatura conforme con EN 12516

	COMPONENTI - PARTS	MATERIALI - MATERIALS
1	CORPO BODY	DIN 17245 GS-C25 DIN 17245 GS-C25
2	CUNEO WEDGE	DIN 17245 GS-C25 DIN 17245 GS-C25
3	TENUTA SEAT	ACCIAIO INOX X10Cr13 SS X10Cr13
4	ASSE STEM	ASTM A182 F6a ASTM A182 F6a
5	MADREVITE STEM NUT	BRONZO ALLUMINIO ALUMINIUM BRONZE
6 / 10	GUARNIZIONE GASKET	ACC. INOX AISI 304+GRAFITE SS AISI 304+GRAPHITE
7 / 11	VITE BOLT	ASTM A193 B7 ASTM A193 B7
8 / 12	DADO NUT	ASTM A194 2H ASTM A194 2H
9	CAPPELLO BONNET	DIN 17245 GS-C25 DIN 17245 GS-C25
13	CAPPELLO BONNET	DIN 17245 GS-C25 DIN 17245 GS-C25
14	GUARNIZIONE GASKET	GRAFITE GRAPHITE
15	VITE BOLT	ASTM A1035 ASTM A1035
16	RONDELLA WASHER	ACC. INOX AISI 304 SS AISI 304
17	ANELLO GLAND	ASTM A182 F6a ASTM A182 F6a
18	PREMISTOPPA PACKING GLAND	DIN 17245 GS-C25 DIN 17245 GS-C25
19	VOLANTINO HANDWHEEL	ASTM A536 ASTM A536