




## SARACINESCA TENUTA METALLICA - CORPO PIATTO PN10 METAL SEATED GATE VALVE - SHORT BODY PN10

### APPLICAZIONE:

Acqua calda e fredda, liquidi non aggressivi (esclusi fluidi e acidi infiammabili).

### APPLICATION:

Hot and cold water, not aggressive liquids (acid and inflammable excluded).

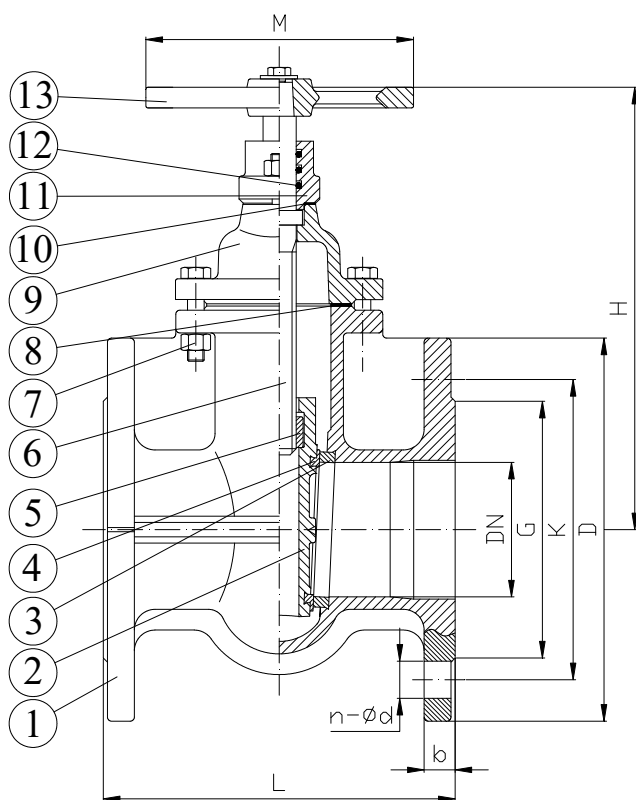

| DN  | G   | K   | D   | L   | H   | M   | n-ød  | b  | W (kg) |
|-----|-----|-----|-----|-----|-----|-----|-------|----|--------|
| 40  | 84  | 110 | 150 | 140 | 194 | 130 | 4-19  | 18 | 9.5    |
| 50  | 99  | 125 | 165 | 150 | 204 | 130 | 4-19  | 20 | 11.4   |
| 65  | 118 | 145 | 185 | 170 | 226 | 130 | 4-19  | 20 | 14     |
| 80  | 132 | 160 | 200 | 180 | 254 | 150 | *8-19 | 22 | 17     |
| 100 | 156 | 180 | 220 | 190 | 295 | 185 | 8-19  | 24 | 24     |
| 125 | 184 | 210 | 250 | 200 | 351 | 185 | 8-19  | 26 | 35     |
| 150 | 211 | 240 | 285 | 210 | 413 | 195 | 8-23  | 26 | 45     |
| 200 | 266 | 295 | 340 | 230 | 498 | 225 | 8-23  | 26 | 78     |
| 250 | 319 | 350 | 395 | 250 | 579 | 245 | 12-23 | 28 | 105    |
| 300 | 370 | 400 | 445 | 270 | 679 | 285 | 12-23 | 28 | 151    |

\*Disponibile anche con 4 fori / \*Available also with 4 holes

### CARATTERISTICHE PRINCIPALI - MAIN FEATURES

|                               |                                                       |
|-------------------------------|-------------------------------------------------------|
| <b>NORMA PROGETTO:</b>        | EN 1171<br>EN 1074-1 ed EN 1074-2<br>EN 558 Serie14   |
| <b>SCARTAMENTO:</b>           | EN 1092-2                                             |
| <b>FLANGE:</b>                | EN 12266-1                                            |
| <b>COLLAUDI:</b>              | PN10 (DN40 -DN150)<br>PN6 (DN200-DN300)               |
| <b>PRESSIONE ESERCIZIO:</b>   | Max. +90°C                                            |
| <b>TEMPERATURA ESERCIZIO:</b> | EN 1171<br>EN 1074-1 and EN 1074-2<br>EN 558 Series14 |
| <b>DESIGN STANDARD:</b>       | EN 1092-2                                             |
| <b>FACE TO FACE:</b>          | EN 12266-1                                            |
| <b>FLANGES:</b>               | PN10 (DN40 -DN150)<br>PN6 (DN200-DN300)               |
| <b>TESTS:</b>                 | Max. +90°C                                            |
| <b>WORKING PRESSURE:</b>      | EN 1171<br>EN 1074-1 and EN 1074-2<br>EN 558 Series14 |
| <b>WORKING TEMPERATURE:</b>   | EN 1092-2                                             |

|    | COMPONENTI - PARTS            | MATERIALI - MATERIALS                                    |
|----|-------------------------------|----------------------------------------------------------|
| 1  | CORPO BODY                    | EN-GJL 250<br>EN-GJL 250                                 |
| 2  | CUNEO WEDGE                   | EN-GJL 250<br>EN-GJL 250                                 |
| 3  | ANELLO DI TENUTA SEALING RING | OTTONE BRASS                                             |
| 4  | ANELLO DI TENUTA SEALING RING | OTTONE BRASS                                             |
| 5  | MADREVITE STEM NUT            | OTTONE BRASS                                             |
| 6  | ASSE STEM                     | ACC.INOX AISI 420 (EN 1.4021)<br>SS AISI 420 (EN 1.4021) |
| 7  | VITE E DADO BOLT AND NUT      | ACCIAIO ZINCATO 8.8<br>GALVANIZED STEEL 8.8              |
| 8  | GUARNIZIONE GASKET            | GRAFITE GRAPHITE                                         |
| 9  | CAPPELLO BONNET               | EN-GJL 250<br>EN-GJL 250                                 |
| 10 | GUARNIZIONE GASKET            | GRAFITE GRAPHITE                                         |
| 11 | PREMISTOPPA PACKING GLAND     | EN-GJL 250<br>EN-GJL 250                                 |
| 12 | O-RING O-RING                 | NBR<br>NBR                                               |
| 13 | VOLANTINO HANDWHEEL           | EN-GJL 250<br>EN-GJL 250                                 |

### RIVESTIMENTO - COATING

Esterno/interno di colore blu RAL 5000.

External/internal coating of blue colour RAL 5000.