


RIDUZIONE A DUE FLANGE PN10-PN16
DOUBLE FLANGED TAPERS PN10-PN16

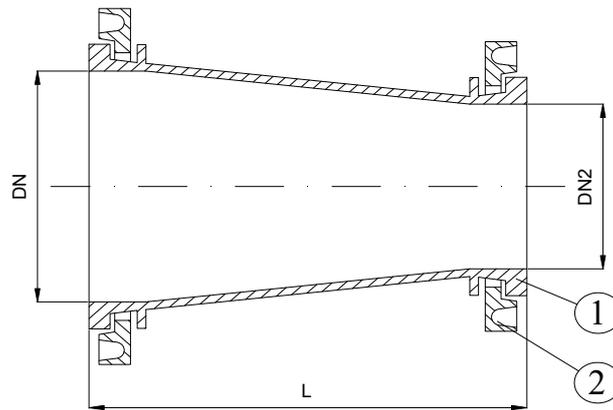

DN	DN2	L	W(kg)
80	60	200	9
100	60	230	11
100	80	200	11
125	80	200	12
125	100	200	12
150	80	200	16
150	100	305	17
150	125	200	15
200	80	300	21
200	100	300	22
200	125	300	23
200	150	275	26
250	200	300	35
300	200	300	39
300	250	300	46
400	300	600	90

	COMPONENTI - PARTS	MATERIALI - MATERIALS
1	CORPO BODY	EN-GJS 400-15 EN-GJS 400-15
2	FLANGE ORIENTABILI LOOSE FLANGES	EN-GJS 400-15 EN-GJS 400-15

RIVESTIMENTO - COATING
Esterno/interno con polvere epossidica di colore blu RAL 5015 e spessore 250µm. External/internal FBE coating process with epoxy resin powder of blue colour RAL 5015 and thickness of 250µm.