




Art. N334 TIS4

BIGIUNTO UNIVERSALE PN10-PN16
UNIVERSAL COUPLING PN10-PN16



APPLICAZIONE:
 Collegamento di tubi per acqua in acciaio, PE e ghisa di diverso diametro esterno.

APPLICATION:
 Steel, PE and ductile iron water pipes connections.

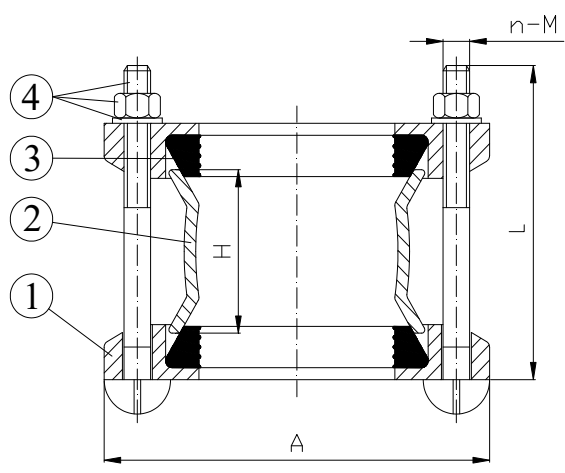

DN	RANGE	A	H	L	n-M
40	48-60	140	95	170	2-M12
50	59-72	156	95	170	2-M12
65	72-85	174	95	170	2-M12
80	88-103	185	95	180	4-M12
100	109-128	218	95	180	4-M12
125	138-153	246	95	180	4-M12
150	159-182	280	104	190	4-M12
175	192-210	312	130	190	4-M12
200	218-235	328	130	210	4-M12
250	272-289	382	130	220	6-M12
300	315-332	430	130	220	6-M12
350	351-378	510	130	230	8-M14
400	390-410	530	130	220	8-M14
400	425-442	557	130	260	8-M14
500	526-546	663	130	270	10-M14
600	630-650	740	130	270	10-M14

	COMPONENTI - PARTS	MATERIALI - MATERIALS
1	FLANGIA FLANGE	GHISA SFEROIDALE DUCTILE IRON
2	CORPO BODY	ACCIAIO RIVESTITO COATED STEEL
3	GUARNIZIONE GASKET	EPDM EPDM
4	VITE, DADO, RONDELLA SCREW, NUT, WASHER	ACCIAIO 8.8 DACROMET 8.8 DACROMET STEEL

RIVESTIMENTO - COATING
Esterno/interno con polvere epossidica di colore blu RAL 5015 e spessore 250µm. External/internal FBE coating process with epoxy resin powder of blue colour RAL 5015 and thickness of 250µm.