



Art. N335 TIS4

GIUNTO UNIVERSALE FLANGIATO PN10-PN16 FLANGE ADAPTER PN10-PN16




APPLICAZIONE:

Collegamento di tubi per acqua in acciaio, PE e ghisa di diverso diametro esterno.

APPLICATION:

Steel, PE and ductile iron water pipes connections.

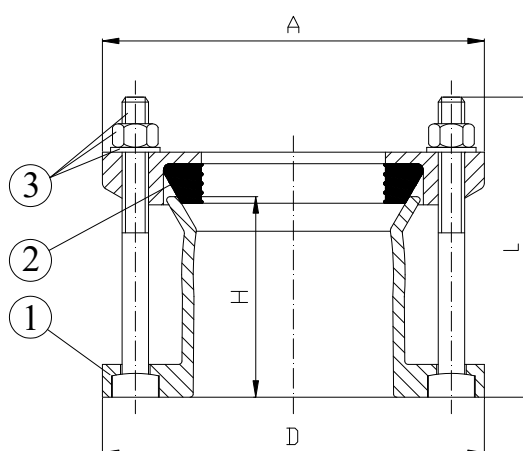

DN	RANGE	A	D	BOLT		Q.tà
				H	ødxL	
50	59-72	156	170	78	M12x130	2
65	72-85	174	180	78	M12x130	2
80	88-103	185	205	78	M12x130	4
100	109-128	218	225	78	M12x130	4
125	138-153	246	255	78	M12x140	4
150	159-182	280	285	78	M12x140	4
200	218-235	328	335	78	M12x140	4
250	272-289	382	402	85	M12x150	6
300	315-332	430	450	85	M12x150	6
350	351-378	510	520	108	M14x180	8
400	390-410	530	580	108	M14x150	8
400	425-442	557	580	108	M14x180	8
500	526-546	663	715	115	M14x180	10
600	630-650	740	840	118	M14x180	10

	COMPONENTI - PARTS	MATERIALI - MATERIALS
1	FLANGIA FLANGE	GHISA SFEROIDALE DUCTILE IRON
2	GUARNIZIONE GASKET	EPDM EPDM
3	VITE, DADO, RONDELLA SCREW, NUT, WASHER	ACCIAIO 8.8 DACROMET 8.8 DACROMET STEEL

RIVESTIMENTO - COATING
Esterno/interno con polvere epossidica di colore blu RAL 5015 e spessore 250µm. External/internal FBE coating process with epoxy resin powder of blue colour RAL 5015 and thickness of 250µm.