

PN 10 - ART. C087TIS

PN 16 - ART. C086TIS




VALVOLA DI RITEGNO ASSIALE PN10 O PN16 AXIAL DISC CHECK VALVE PN10 OR PN16

APPLICAZIONE:

Fornitura, raccolta, distribuzione di acqua.

APPLICATION:

Supply, collection, distribution of water.

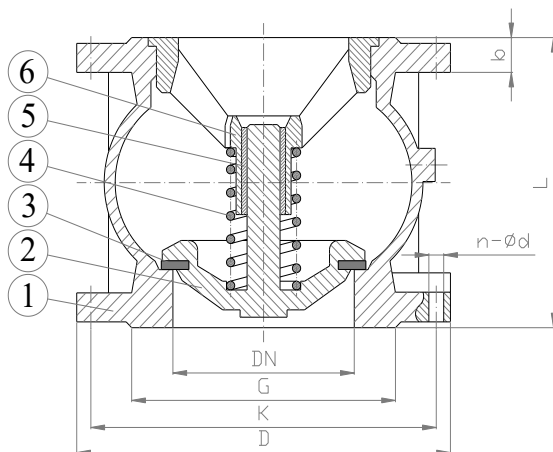

CARATTERISTICHE PRINCIPALI - MAIN FEATURES

NORMA PROGETTO:	EN 16767
FLANGE:	EN 1092-2
COLLAUDI:	EN 12266-1
TEMPERATURA ESERCIZIO:	Max. +70°C
CONTROPRESSIONE:	Min. 0,3 bar
DESIGN STANDARD:	EN 16767
FLANGES:	EN 1092-2
TEST:	EN 12266-1
WORKING TEMPERATURE:	Max. +70°C
BACKPRESSURE:	Min. 0,3 bar

	COMPONENTI - PARTS	MATERIALI - MATERIALS
1	CORPO BODY	EN-GJL 250 EN-GJL 250
2	DISCO DISC	EN-GJS 400-15 EN-GJS 400-15
3	GUARNIZIONE SEAL	EPDM EPDM
4	MOLLA SPRING	ACCIAIO INOX STAINLESS STEEL
5	GUIDA GUIDE	OTTONE BRASS
6	GUIDA GUIDE	EN-GJS 400-15 EN-GJS 400-15

RIVESTIMENTO - COATING

Esterno / interno con polvere epossidica di colore blu RAL 5017 e spessore 200µm.

External FBE coating process with epoxy resin powder of blue colour RAL 5017 and thickness of 200µm.

DN	G	K		D		n-ød		b		L	W (kg)
		PN10	PN16	PN10	PN16	PN10	PN16	PN10	PN16		
50	98	125	125	165	165	4-19	4-19	20	20	100	5.7
65	118	145	145	185	185	4-19	4-19	20	20	120	8.7
80	132	160	160	200	200	8-19	8-19	22	22	140	10.8
100	156	180	180	220	220	8-19	8-19	24	24	170	13.5
125	184	210	210	250	250	8-19	8-19	26	26	200	21.0
150	211	240	240	285	285	8-23	8-23	26	26	230	30.0
200	260	295	295	340	340	8-23	12-23	26	30	300	49.0
250	319	350	355	405	405	12-23	12-28	28	32	370	73.3
300	370	400	410	460	460	12-23	12-28	28	32	410	90.0