


VALVOLA A FLUSSO AVVIATO PN16
GLOBE VALVE ON-OFF TYPE PN16
APPLICAZIONE:

Acqua e altri liquidi non pericolosi (compatibili con i materiali della valvola).

APPLICATION:

Water and other non-hazardous liquids (compatible with valve materials).

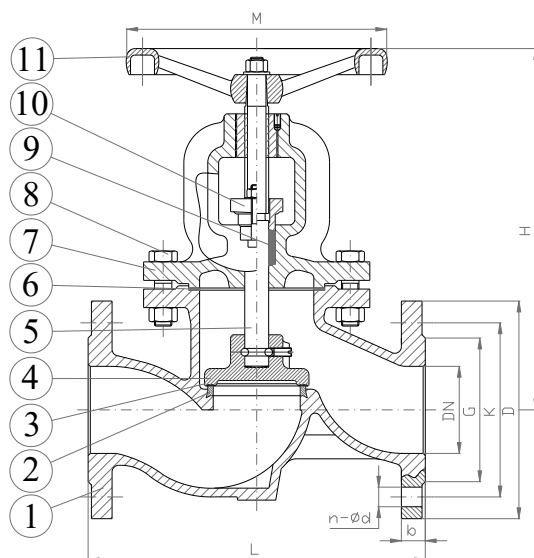

| DN | D | K | G | b | n-ød | L | H | M | W (kg) |
|-----|-----|-----|-----|----|-------|-----|-----|-----|--------|
| 15 | 95 | 65 | 46 | 14 | 4-14 | 130 | 182 | 120 | 3.6 |
| 20 | 105 | 75 | 56 | 16 | 4-14 | 150 | 185 | 120 | 4.2 |
| 25 | 115 | 85 | 65 | 16 | 4-14 | 160 | 201 | 120 | 5.2 |
| 32 | 140 | 100 | 76 | 18 | 4-19 | 180 | 253 | 120 | 7.0 |
| 40 | 150 | 110 | 84 | 18 | 4-19 | 200 | 254 | 140 | 9.5 |
| 50 | 165 | 125 | 99 | 20 | 4-19 | 230 | 277 | 160 | 12 |
| 65 | 185 | 145 | 118 | 20 | 4-19 | 290 | 312 | 160 | 17 |
| 80 | 200 | 160 | 132 | 22 | 8-19 | 310 | 342 | 175 | 23 |
| 100 | 220 | 180 | 156 | 24 | 8-19 | 350 | 378 | 195 | 31 |
| 125 | 250 | 210 | 184 | 26 | 8-19 | 400 | 447 | 245 | 58 |
| 150 | 285 | 240 | 211 | 26 | 8-23 | 480 | 503 | 315 | 74 |
| 200 | 340 | 295 | 266 | 30 | 12-23 | 600 | 591 | 400 | 140 |
| 250 | 405 | 355 | 319 | 32 | 12-28 | 730 | 680 | 400 | 169 |

CARATTERISTICHE PRINCIPALI - MAIN FEATURES

| | |
|----------------------------------|----------------|
| SCARTAMANETO: | EN 558 Serie 1 |
| FLANGE: | EN 1092-2 |
| COLLAUDI: | EN 12266-1 |
| GRADO DI TENUTA: | Rate B |
| TEMPERATURA DI ESERCIZIO: | Max. +100°C |
| FACE TO FACE: | EN 558 Serie 1 |
| FLANGES: | EN 1092-2 |
| TEST: | EN 12266-1 |
| LEAKAGE RATE: | Rate B |
| WORKING TEMPERATURE: | Max. +100°C |

| | COMPONENTI - PARTS | MATERIALI - MATERIALS |
|----|--------------------------------|--|
| 1 | CORPO BODY | EN-GJL 250 EN-GJL 250 |
| 2 | TENUTA CORPO BODY SEAL RING | ACCIAIO INOX AISI 304 AISI 304 STAINLESS STEEL |
| 3 | TENUTA DISCO DISC SEAL RING | ACCIAIO INOX AISI 304 AISI 304 STAINLESS STEEL |
| 4 | OTTURATORE OBTURATOR | EN-GJL 250 EN-GJL 250 |
| 5 | ASSE STEM | ACC.INOX AISI420 (EN 1.4021) SS AISI420 (EN 1.4021) |
| 6 | GUARNIZIONE GASKET | GRAFITE GRAPHITE |
| 7 | CAPPELLO BONNET | EN-GJL 250 EN-GJL 250 |
| 8 | VITE E DADO BOLT & NUT | ACCIAIO ZINCATO GALVANIZED STEEL |
| 9 | GUARNIZIONE GASKET | GRAFITE GRAPHITE |
| 10 | PREMISTOPPA PACKING GLAND | EN-GJL 250 EN-GJL 250 |
| 11 | VOLANTINO HANDWHEEL | EN-GJL 250 EN-GJL 250 |

RIVESTIMENTO - COATING

Colore grigio RAL 7015.
Grey colour RAL 7015.