


RIDUZIONI CONCENTRICHE SENZA SALDATURA

SEAMLESS CONCENTRIC REDUCERS

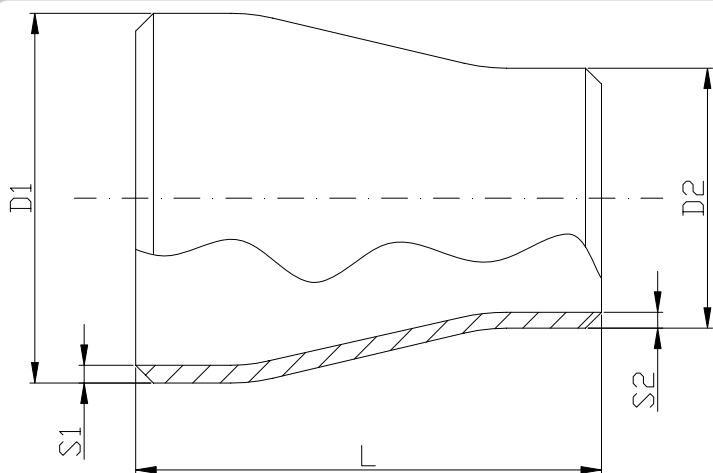

ACCIAIO: St 35.8/l
DIMENSIONI: DIN 2616/2 - DIN 2609
STEEL: St 35.8/l
DIMENSIONS: DIN 2616/2 - DIN 2609

DN1	DN2	D1	D2	S1	S2	L	Peso (kg) Weight
25	20	33.7	26.9	2.6	2.3	50	0.09
32	20	42.4	26.9	2.6	2.3	50	0.13
	25		33.7		2.6		0.14
40	20	48.3	26.9		2.3		0.19
	25		33.7	2.6	2.6	64	0.20
	32		42.4		2.6		0.20
50	25	60.3	33.7		2.6		0.31
	32		42.4	2.9	2.6	76	0.32
	40		48.3		2.6		0.33
65	32	76.1	42.4		2.6		0.47
	40		48.3	2.9	2.6	90	0.48
	50		60.3		2.9		0.49
80	40	88.9	48.3		2.6		0.61
	50		60.3	3.2	2.9	90	0.62
	65		76.1		2.9		0.63
100	50	114.3	60.3		2.9		0.98
	65		76.1	3.6	2.9	100	1.00
	80		88.9		3.2		1.00
125	65	139.7	76.1		2.9		1.70
	80		88.9	4.0	3.2	127	1.74
	100		114		3.6		1.76
150	80	168.3	88.9		3.2		2.7
	100		114.3	4.5	3.6	140	2.82
	125		139.7		4.0		2.94
200	100	219.1	114.3		3.6		5.03
	125		139.7	6.3	3.6	152	5.12
	150		168.3		4.5		5.18
250	150	273	168.3		4.5		7.40
	200		219.1	6.3	6.3	178	7.55
300	200	323.9	219.1		6.3		11.50
	250		273	7.1	6.3	203	11.90
350	250	355.6	273		6.3		23.00
	300		323.9	8.0	7.1	330	23.50
400	250	406.4	273		6.3		31.40
	300		323.9	8.8	7.1	355	32.20