



PN 25 - Art. E053


PN 40 - Art. E054

SFIATO SINGOLO GALLEGGIANTE PN25-PN40**AIR RELEASE VALVE SINGLE CHAMBER PN25-PN40****APPLICAZIONE:**

Impiego su rete di distribuzione, sistemi di irrigazione.

APPLICATION:

Water works and irrigation systems.

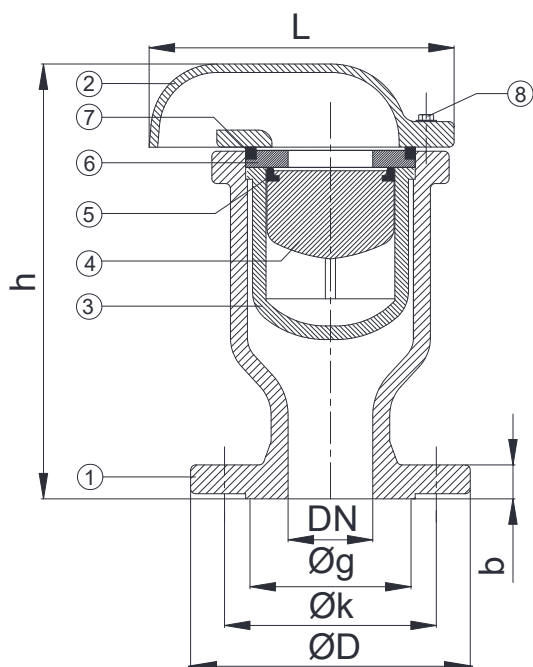

	COMPONENTI - PARTS	MATERIALI - MATERIALS
1	CORPO BODY	EN - GJS 400 - 15 EN - GJS 400 - 15
2	COPERCHIO COVER	EN - GJS 400 - 15 EN - GJS 400 - 15
3	GABBIA CAGE	POLIAMIDE 6 POLYAMID 6
4	GALLEGGIANTE FLOATER	POLIPROPILENE FOAMED POLYPROPYLENE
5	O-RING O-RING	EPDM EPDM
6	DISCO DISC	OTTONE BRASS
7	O-RING O-RING	EPDM EPDM
8	VITE E RONDELLA SCREW & WASHER	ACCIAIO 8.8 STEEL 8.8

RIVESTIMENTO - COATING

Esterno/interno con polvere epossidica di colore blu RAL 5005 e spessore 250µm.

External/internal FBE coating process with epoxy resin powder of blue colour RAL 5005 and thickness of 250µm.

ART.	E053								E054							
DN	50	65	80	100	125	150	200	250	50	65	80	100	125	150	200	250
L	180	180	180	265	265	265	345	440	180	180	180	265	265	265	345	440
h	260	260	260	320	320	320	450	810	260	260	260	320	320	320	450	810
Weight (kg)	11.0	12.0	14.5	24.5	27	31.5	56.0	180	11.0	12.0	14.5	24.5	27	31.5	57.0	185
øD	165	185	200	235	270	300	360	425	165	185	200	235	270	300	375	450
øk	125	145	160	190	220	250	310	370	125	145	160	190	220	250	320	385
øg	99	118	132	156	184	211	274	330	99	118	132	156	184	211	284	345
n x ød	4X19	8X19	8X19	8X23	8X28	8X28	12X28	12X31	4X19	8X19	8X19	8X23	8X28	8X28	12X31	12X34
b	19	19	19	19	19	20	22	24.5	19	19	19	19	23.5	26	30	34.5
Viti / Bolt	M16	M16	M16	M20	M24	M24	M24	M27	M16	M16	M16	M20	M24	M24	M27	M30